

▶ Professional 2.0-TLA-TL-TLC-TLF
▶ TM-TB-VSP



PROFESSIONAL EQUIPMENTS
FOR THE FIREWOOD PROCESSING



DISC PROCESSORS

With independent splitter installed in Georgia (USA)

Studied to produce firewood from hard wood logs with variable diameters from 10 to 70 cm and lengths up to 21 m **operated by 3 operators.**



- 1 - 4-chain log loader, 10 m in length
- 2 - 2-chain log loader, 10 m length
- 3 - Chain saw for sectioning logs
- 4 - Cut group TLA 18, electric motor 75 kW
- 5 - Drum sieve for the cleaning of the processed material
- 6 - Unloading belt, 180° adjustable
- 7 - Vertical automatic splitting station TB 900, 40 tons, 22 kW, for diameters up to 90 cm
- 8 - Horizontal splitting station, 40 tons, 18,5 kW
- 9 - Splitting station, GENIUS grid, 30 tons, 22 kW
- 10 - Cut disc 1800 mm for processing logs with diameters up to 70 cm

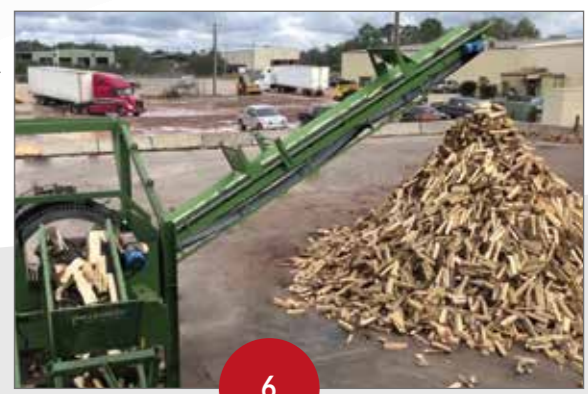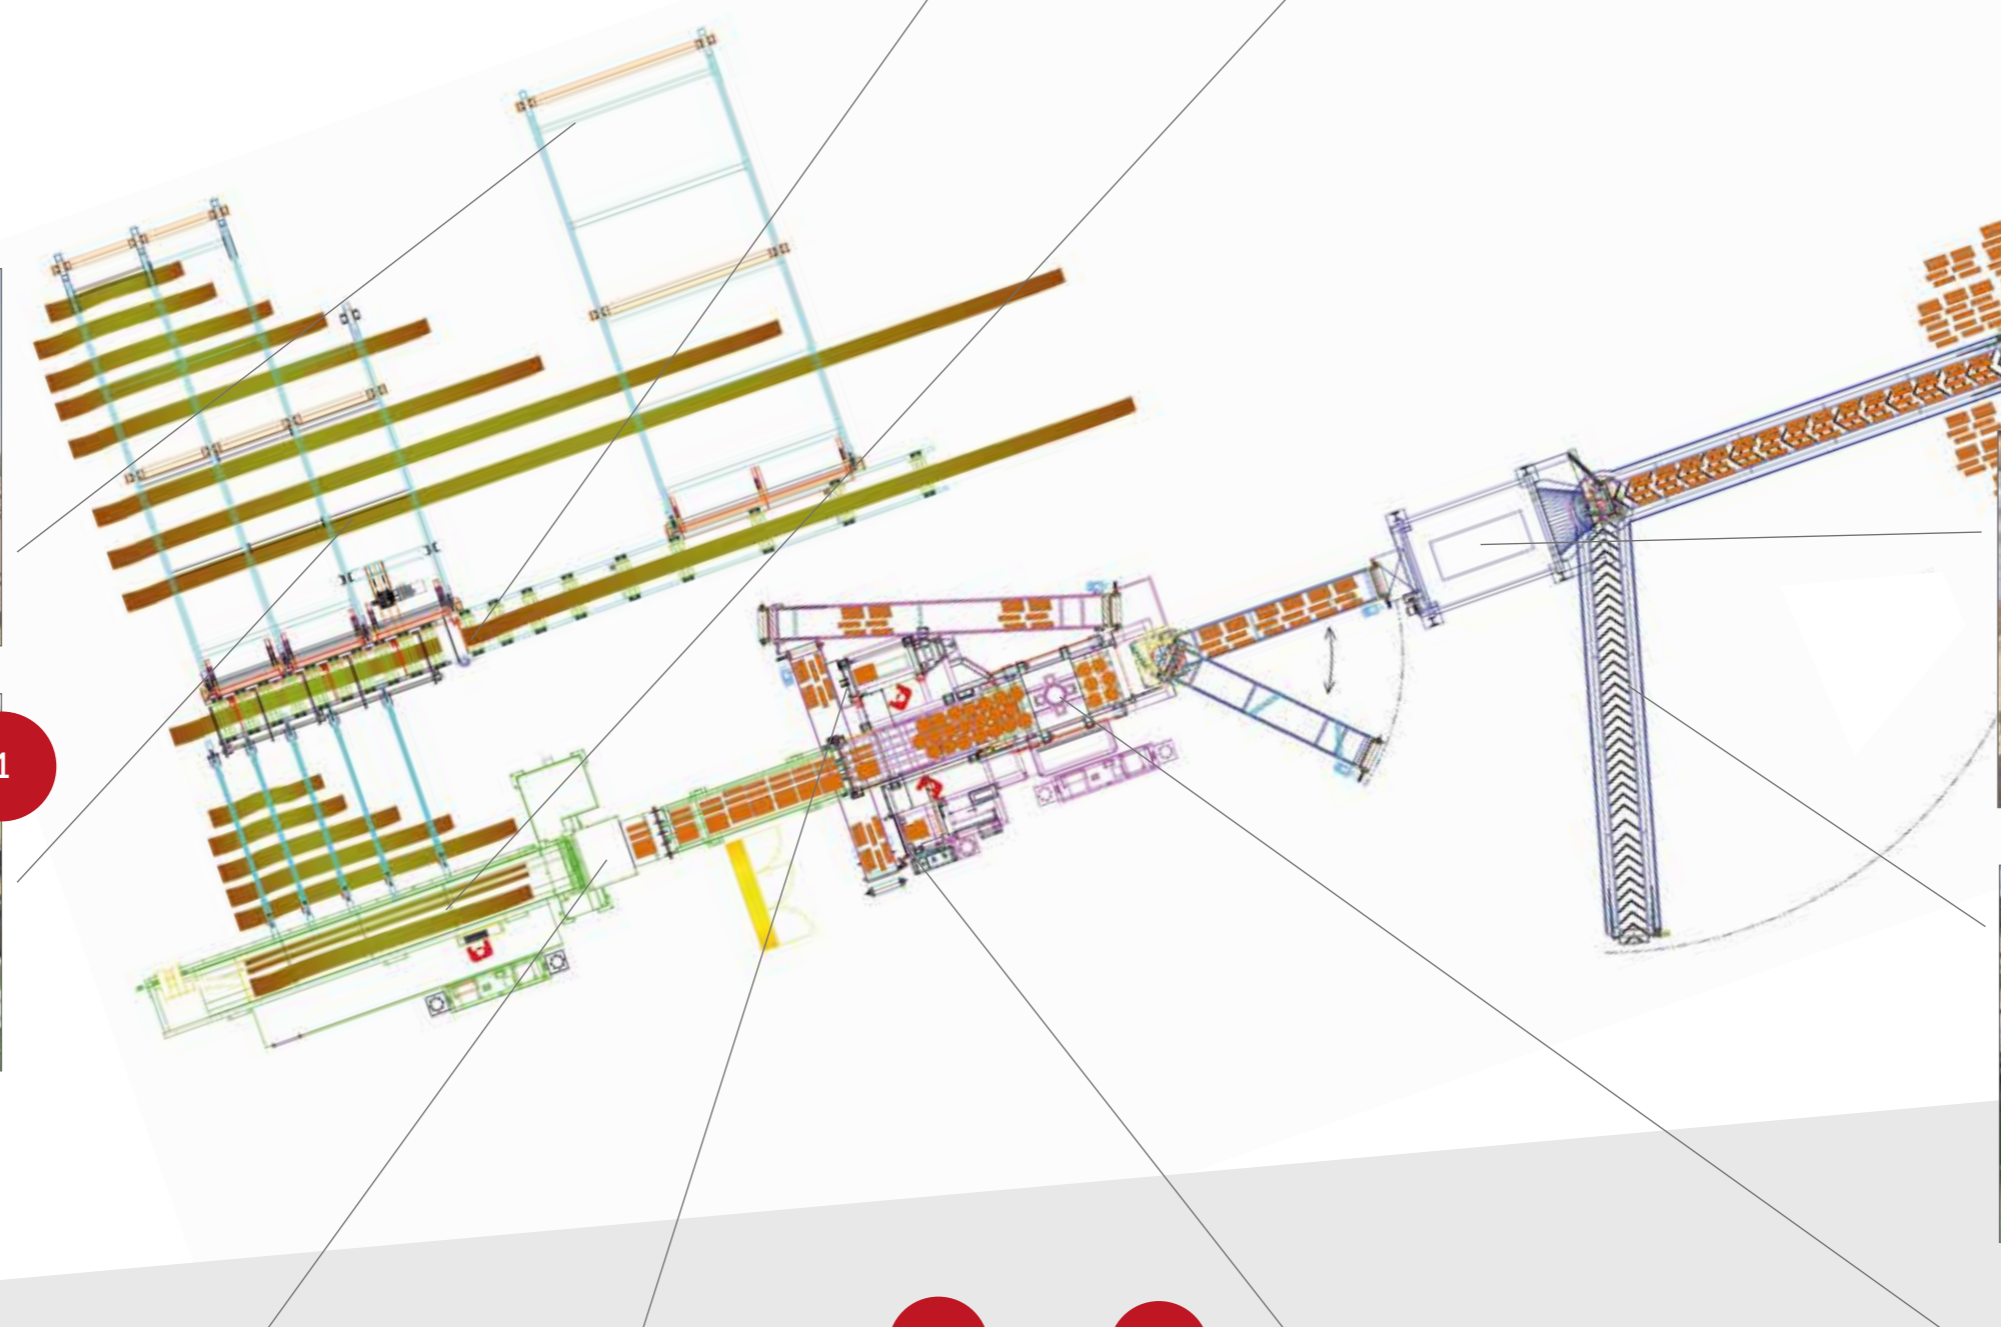



DISC PROCESSORS

With integrated splitter,
installed in France (Rhône)

Operated by 1 or 2 operators according
to the real configuration.



- 1 - 3-chain log loader, 8 m in length
- 2 - Feeding conveyor with loading dumpers
- 3 - TLC 1300, electric motor 37 kW, operator's platform with stairs
- 4 - Hydraulic chain wood blocking
- 5 - Conveyor belt for loading the processed wood
- 6 - Independent splitting station for refining the biggest logs
- 7 - S-shaped conveyor for collecting and transferring the processed wood
- 8 - Vertical development grid with two splitting sectors
- 9 - Splitting and cut solution by a single operator
- 10 - Control panel

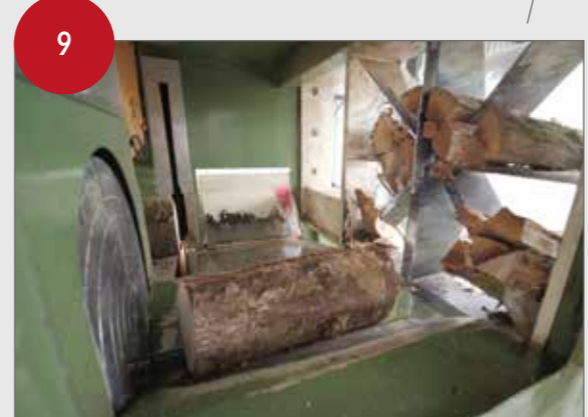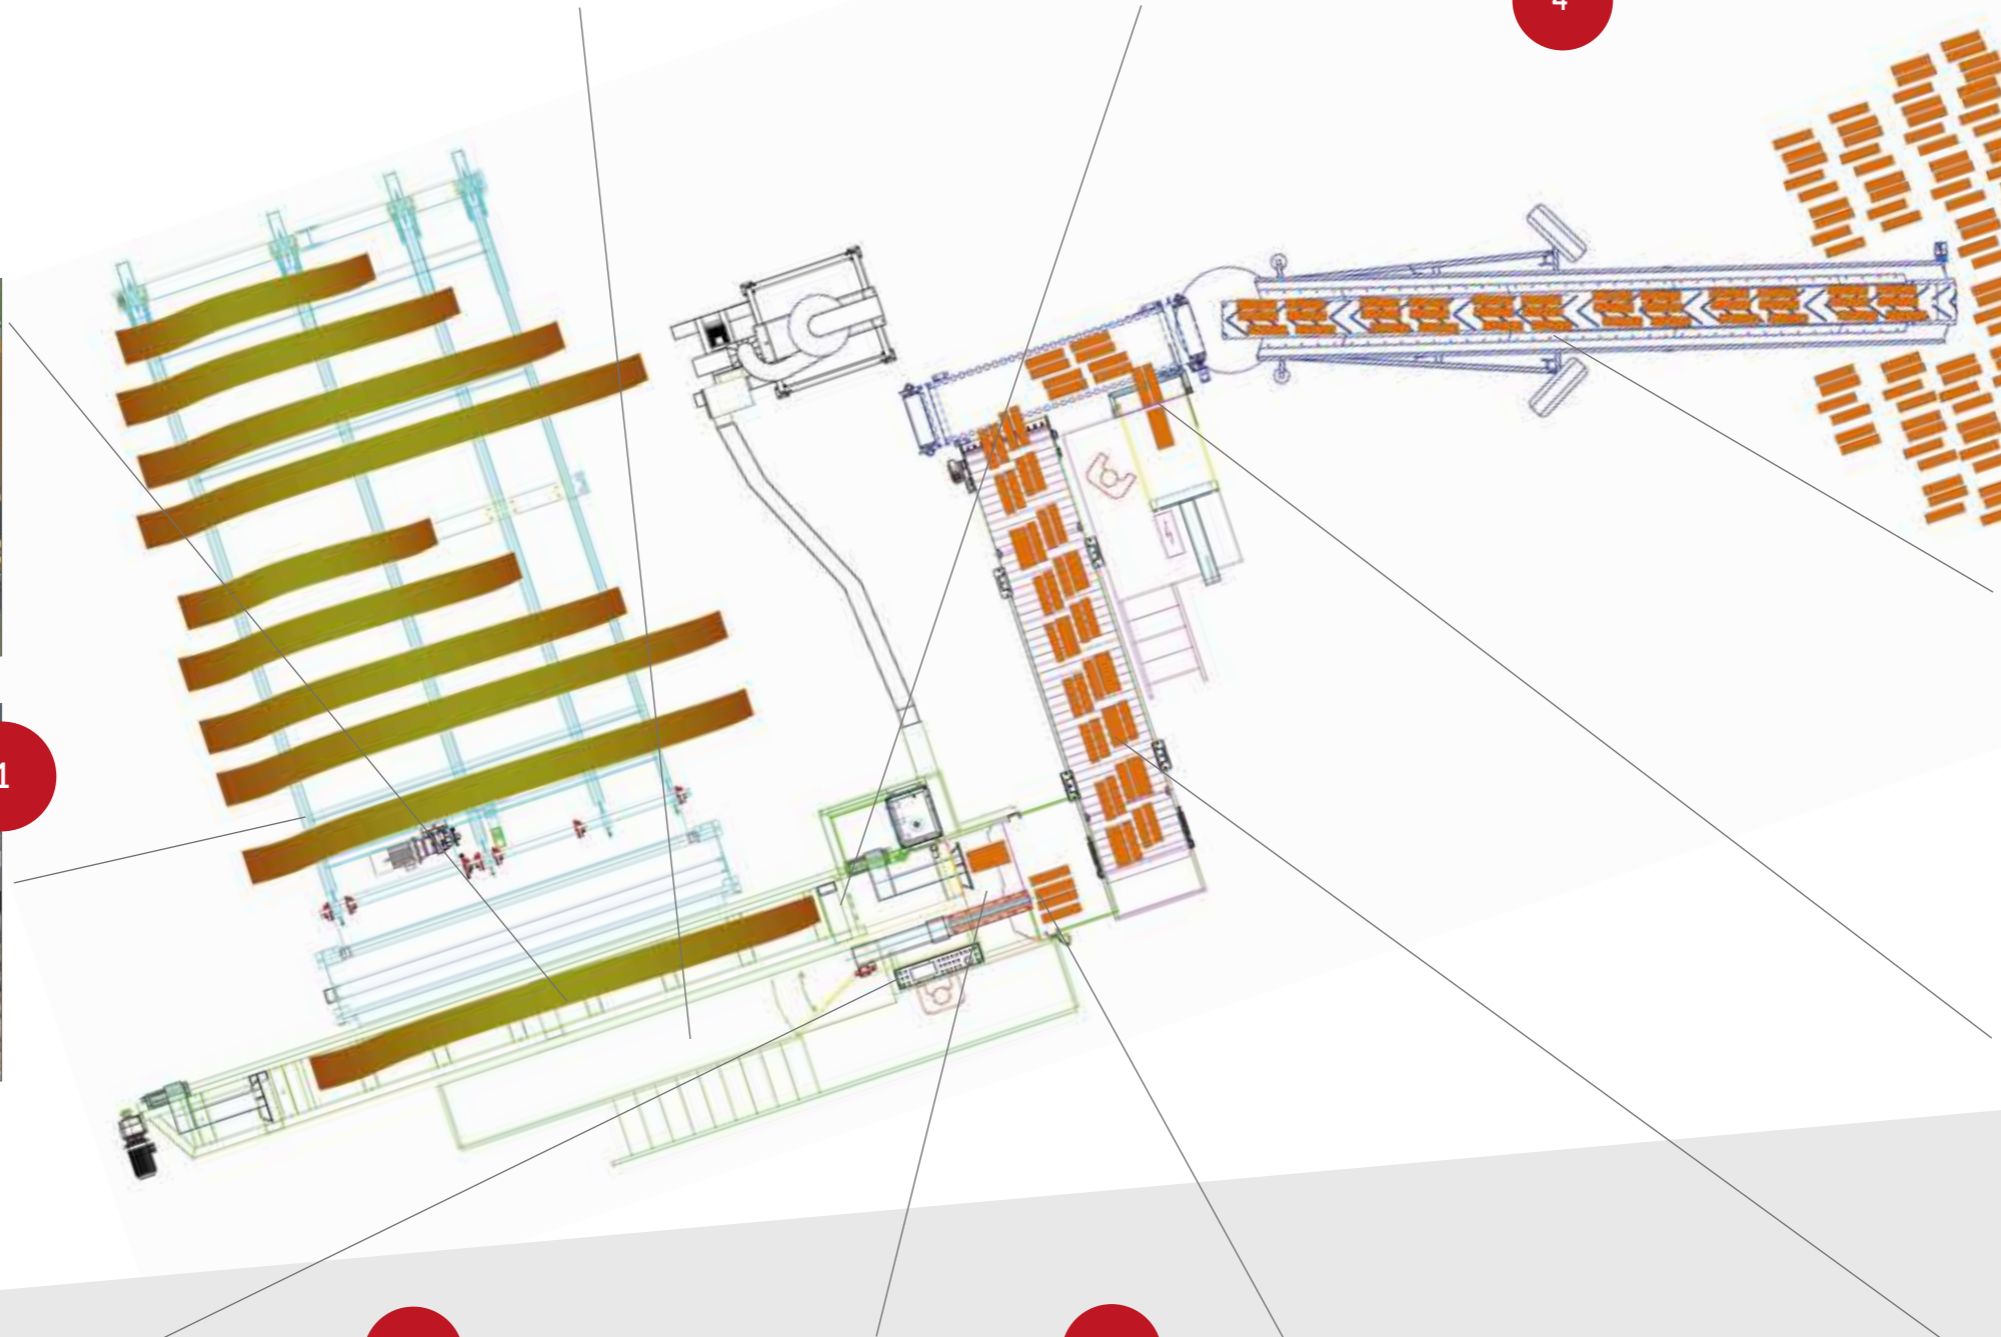

DISC PROCESSOR


Customised equipment for firewood production, installed in Ukraine.

Studied to produce firewood from hard wood logs with variable diameters from 5 to 59 cm and lengths up to 6 m for charcoal production.

Modular solution operated by 3 to 11 operators



- 1 - N° 3 log loaders (N° 2 4-chain log loaders, 10 m length + N° 1 5-chain log loader, 13 m length)
- 2 - Safety barriers to delimitate the working area
- 3 - Output material from TB 900
- 4 - Vertical automatic splitting station TB 900, 40 tons, 22 kW
- 5 - Storage area for the processed material
- 6 - N° 7 horizontal splitting stations (N° 4 20 tons and N° 3 32 tons)
- 7 - Safety photocells and laser centering for automatic splitting grid positioning
- 8 - Hydraulic block system with mechanical jacks
- 9 - High performance feeding conveyor TLA 15
- 10 - N° 3 cut stations TLA 15 - 55 kW, liftable pusher

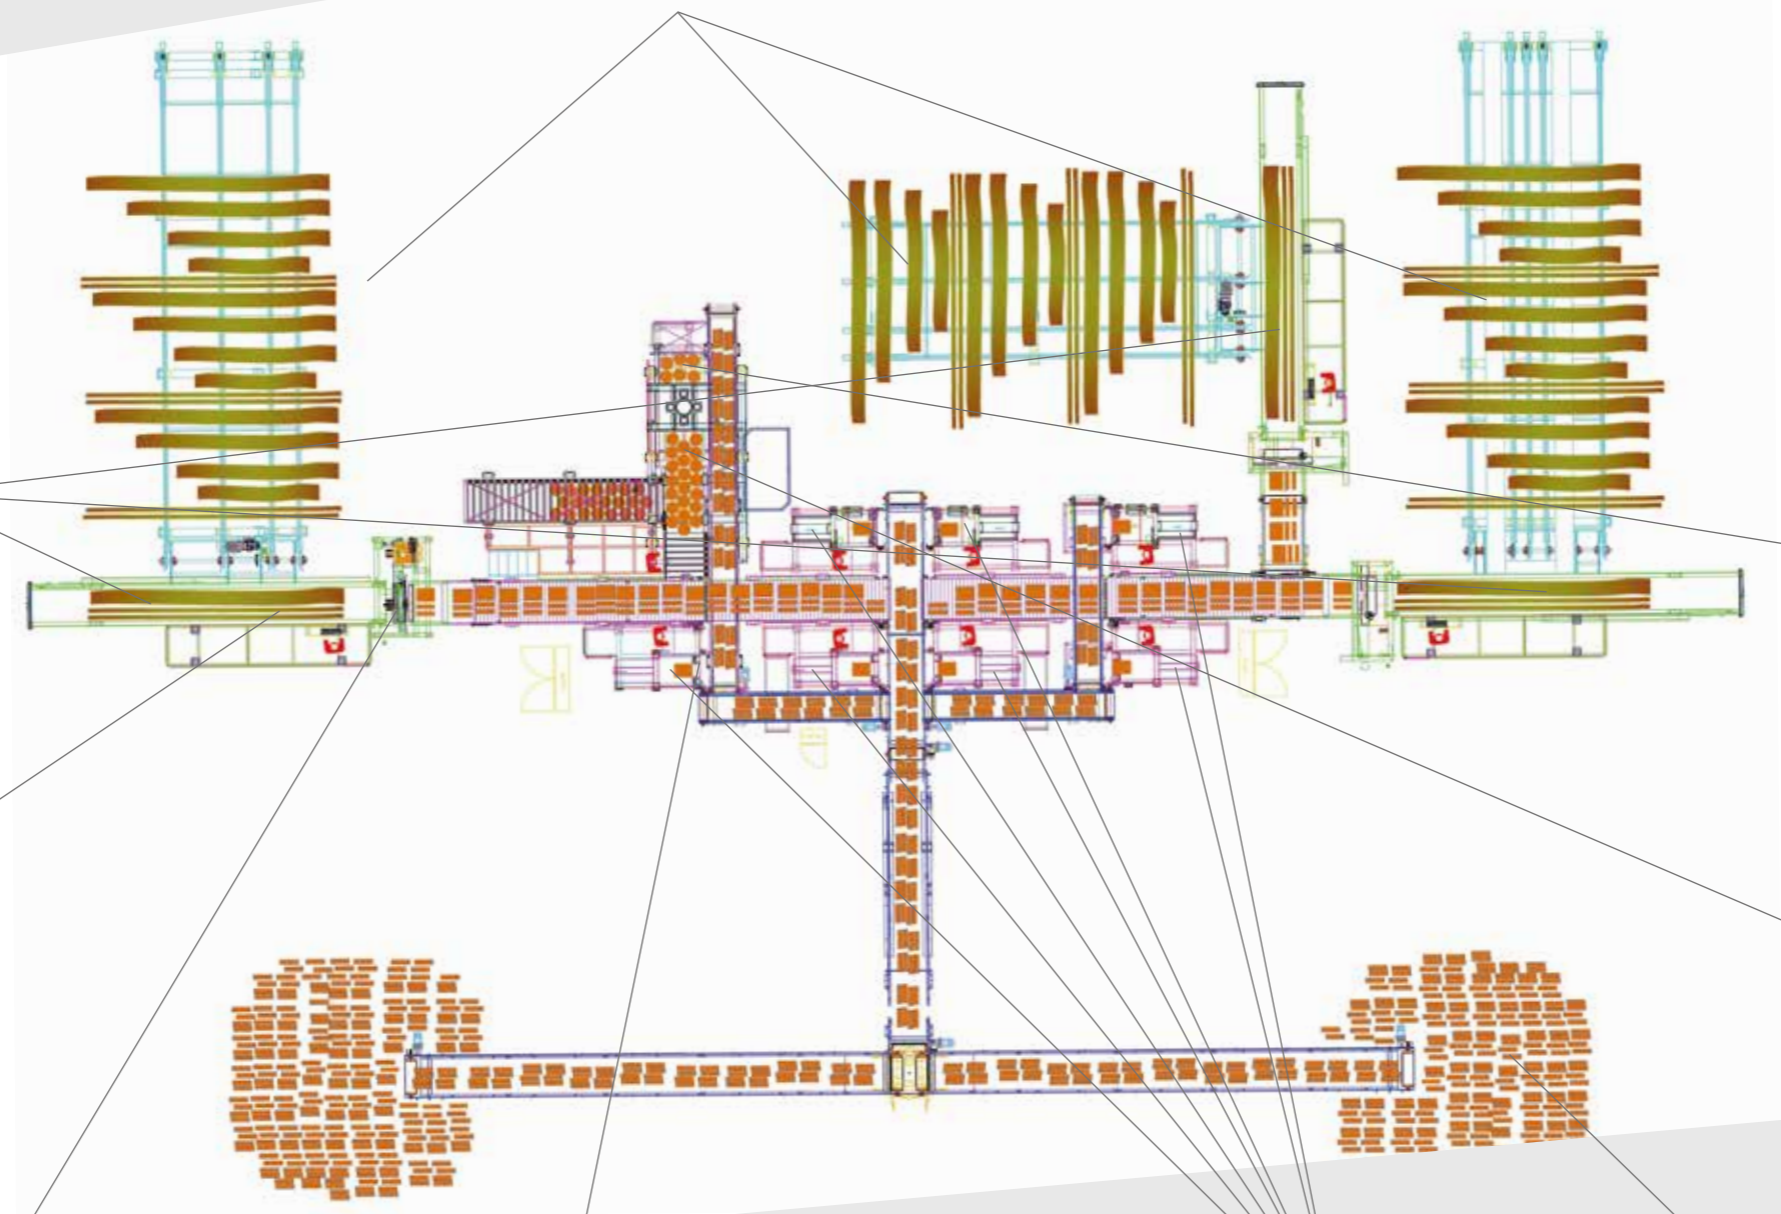



Only cut

Firewood disc machines PROFESSIONAL 2.0, TLA and TL are the result of the technological development since the 80s, when Pezzolato started to produce the first firewood processors with high production capacity.

This machine is conceived to process mixed wood with different diameters and lengths.

From the control panel the operator can choose the cutting length, manually or in automatic; he can also operate the log loader.



Feeding with sawmill edgings

After cutting, the logs fall in a cumulating S-shaped conveyor with closed meshes, which transfers them in front of the wood splitter.

Two operators guarantee the machine highest productivity. One operator only, who cuts first and then splits, obtains anyway a good production.

All machines are provided with all safety devices in compliance with the current regulations. It allows processing wood in a reliable, safe and effective way and guarantees high production capacity.



Cumulating conveyor for cut material



Feeding with logs



Chain locking system. It work with every kind of bundles



Feeding with large diameter logs (TLA)



Mechanical jacks locking system. Efficient on all species of bundles



TLC 1000



TLC 1300

Cut and split

The machines range called TLC, TLF are characterized by the presence of the integrated wood splitter.

Their main features are the following:

- They are operated by one operator only
- They can work manually or totally in automatic
- Speed of the cutting cycle as the disc is equipped with a hydraulic drive

From the control panel the operator can choose, manually or in automatic, the cutting length, the splitting grid positioning, the rests shape; he can also operate the log loader.



Control panel

By automatic cut, the splitting grid moves automatically according to the wood diameter to be split.

The very wide feeding conveyor makes these machines suitable to work not only the single log but also bundles of logs with heterogeneous diameters and shapes, which do not need to be split, with the simple exclusion of the splitting grid.

Working with TLF machine, the splitting phase is very quick thanks to the positioning of the splitter. Being that in lower position with respect to the disc, it makes the cut log fall directly, thus avoiding the cut wood transferring times.

The particular shape of the machine makes it easy for the operator to see and control any stage of the working cycle with no effort.



Adjustable splitting grid (TLF model)



Cut and split configuration



Only cut configuration



Feeding conveyor and wood pusher (TLF model)



Cutting disc (TLF model)



- ✓ Mobile version of the equipment: it allows the processing of the wood in the forestry site directly
- ✓ Hydraulic proportional system with ramps, including a hydraulic pump for all the functions of the cutting group; optimized management of the stroke of the wood blocking and of the disc output
- ✓ Electric heaters for hydraulic oil for the machines which have to work in cold conditions (below 0 degrees)
- ✓ Dedicated configurations in order to install equipments with mechanisations also in narrow areas
- ✓ GSM/Ethernet router for remote assistance



Mobile version



Dedicated configurations

Options

- ✓ Lifting pusher with mechanical / pneumatic system
- ✓ Loading dumpers, in order to process great dimension logs. They eliminate the excessive stress on the machine body
- ✓ Equipment elevation: it facilitates the maintenance and cleaning operations



Lifting pusher with mechanical/pneumatic system



Loading dumpers



Equipment elevation

Professional 2.0

Disc diameter with teeth in tungsten carbide:	mm	1000 - 1100 - 1200
Feeding conveyor width:	mm	600
Maximum inlet passage:	mm	600 x 530
Maximum log diameter:	mm	400 - 440 - 470
Maximum log passage:	mm	da 3000 a 6800
Electric motor power:	kW	30 - 37
Minimum tractor power:	Hp	70 - 80

TLA 13 - 15 - 18 - 20 - 22

		TLA 13	TLA 15	TLA 18	TLA 20	TLA 22
Disc diameter with teeth in tungsten carbide	mm	1300	1500	1800	2000	2200
Maximum log diameter	mm	510	590	710	780	850
Feeding conveyor width	mm	800	800	1000	1000	1000
Maximum inlet passage	mm	800 x 550	800 x 640	1000 x 750	1000 x 820	1000 x 880
Maximum log passage (std)	m	from 3,4 to 6,8	from 3,4 to 6,8	from 3,4 to 6,8	from 3,4 to 6,8	from 3,4 to 6,8
Electric motor power	kW	45 - 55	55 - 75	75 - 90	110-132	110-132

TL 1800 - 2000

		TL 1800	TL 2000
Disc diameter with teeth in tungsten carbide	mm	1800	2000
Maximum log diameter	mm	700	800
Maximum log passage (std)	mm	from 3400 to 6800 mm	from 3400 to 6800 mm
Electric motor power	kW	55	75



- ✓ Hydraulic chain wood blocking instead of the standard guillotine device (this is suggested in order to cut wood and bundles which do not need to be split)
- ✓ Operator's platform with stairs
- ✓ Short cut system (70-100 mm), last cut included
- ✓ Rear leveller for short wood
- ✓ Safety barriers to delimitate the working area
- ✓ Extra-charge for the feeding conveyor width 1300 mm for the feeding by crane



Safety barriers to delimitate the working area



Platform for control board with stairs

Options

- ✓ Hydraulic log turner, in order to position extremely crooked logs in the best way to cut them
- ✓ Wood-splitter's vertical cutting grid with two splitting sectors: the first one fixed with 2+4+6 or 2+4+8 folds and the second one with 10 or 12 or 16 or 18 or 24 folds, removable for maintenance operations and interchangeable.



Hydraulic chain wood blocking



Multi-sector grid



Hydraulic log turner

► TLF 450

		TLF 450
Disc diameter with teeth in tungsten carbide:	mm	1100
Maximum log diameter:	mm	430
Maximum log passage:	mm	3550
Splitting force:	Ton	20-27-32
Maximum splitting length:	mm	660
Hydraulic splitting grid/wedge:	folds	on request
Electric motor power:	kW	22 - 30
Minimum tractor power:	Hp	60
Diesel motor power:	Hp	67

► TLC 1000/1100 - 1200/1300 - 1500

		TLC 1000 - 1100	TLC 1200 - 1300	TLC 1500
Disc diameter with teeth in tungsten carbide:	mm	1000 - 1100	1200 - 1300	1500
Maximum log diameter:	mm	400 - 440	460 - 510	600
Maximum log passage (std):	m	from 3,4 to 6,8	from 3,4 to 6,8	from 3,4 to 6,8
Splitting force:	Ton	20 - 27	25/32 - 32/45	70
Maximum splitting length:	mm	600 - 1050	600 - 1050	600 - 1050
Hydraulic splitting grid/wedge:	folds	on request	on request	on request
Electric motor power:	kW	22 - 30	30/37 - 37/45	55 - 75
Minimum tractor power:	Hp	60	60	-



TM - Cutting unit



TB - Splitting unit

TM - Cutting unit

The wide availability of large diameter logs, not suitable to be processed by the sawmill industry, brought the company Pezzolato to develop a new equipment for high quality firewood by processing logs with diameters even larger than 1 meter.

This equipment is divided in: TM - CUTTING UNIT with a conveyor system to cut logs of any type.

The machine presents a large thickness (30 mm) feeding cradle which can support logs with a length of 6 meters (longer on demand) and a max. diameter of 120 cm.

The logs, by means of a rear pushing unit, are pushed onto the chain saw unit and blocked there before being cut by a hydraulic guillotine system. The chain saw unit, sliding vertically, is driven by an electric motor with a power up to 22 kW.

A step-measurement system allows the electronic setting of the cut logs length. After the cut, a tilting surface, hydraulically moved, skids the cut logs on the feeding chain of the second unit, TB - SPLITTING UNIT.



Feeding cradle with rear pushing unit



Tilting surface for for offloading cut logs

TB - Splitting unit

TB - SPLITTING UNIT is equipped with an automatic vertical splitting system, able to process any type of logs, with a diameter range varying from 300 to 1200 mm and a height range varying up to 500 mm.

This unit conceived to process large diameter logs has an adjustable pitch feeding and is driven by an electric motor 22 kW; the splitting power can be 40 or 50 tons.

The machine has a closed-link feed chain, 1600 mm in length (longer on demand).

By means of this chain, the cut logs pass through the action of the splitting wedge. The dimensions of the output wood can be set electronically: The splitting section can vary according to the diameter and length of the log and to the loading type.

The TB splitting unit, in the 1200 mm version, produces 21 cubic meters of solid wood per hour, considering logs 250 mm long with 100 x 100 mm section.



Wedge for automatic vertical splitting system



Firewood logs with regular size and minimum wastes



- ✓ Special splitting wedge for producing kindling can be swapped with the standard wedge.
- ✓ Chainsaw unit slides vertically over chrome bars with hydraulic cylinder and proportional control in relation to the log diameter
- ✓ Wood clamping hydraulic guillotine with the sliding system on chromed bars



Kindling 20 x 20 mm

Options

- ✓ From the pulpit the operator can control all operations of the sawing unit and all associated operations such as loading, splitting and offloading, controlling the entire process
- ✓ Electronic cut log measurement: The splitting section can vary according to the diameter and length of the log and to the loading type.



Automatic cutting operation



Horizontal sliding cut-off chain



Wood clamping hydraulic guillotine

► TB - Splitting unit

Minimum log diameter:	mm	300
Maximum log diameter:	mm	900 (TB 900) - 1200 (TB 1200)
Electric engine power:	kW	22 (TB 900) - 30 (TB 1200)
Splitting force:	Ton	40 (TB 900) - 50 (TB 1200)
Cut logs length:	mm	up to 500
Duty-cycles/minute (stroke 500 mm):		8 (TB 900) - 8 (TB 1200)
Kindling minimum size:	mm	20 x 20

The splitting section can vary according to the diameter and length of the log and to the loading type

► TM - Cutting unit

Maximum log diameter:	mm	1200
Chainsaw electric motor power:	kW	22
Ancillary services electric motor power:	kW	7.5
Chainsaw bar length:	mm	1600



Log size: 70 x 70 mm



Log size: 150 x 150 mm

EQUIPMENT COMPONENTS

Logs loader

Logs loader, electro-welded structure, hydraulically operated, with variable lengths according to the user's needs.

Depending on the type of wood to be processed, Pezzolato proposes the most suitable logs loader. It can be equipped with a variable number of chains, depending on the length of the material to be handled; with log separating system and with different loading system: C-shaped or with pushers or steps with alternating movement depending on the type of logs to be processed.



Logs loader with log separating system



C-shaped loading system



Loading system with pusher



Logs loader length 25 meters



Logs loader with closing infills



Logs loader without closing infills



3 chain logs loader for 1 meter length wood and mechanical banks for containing material

EQUIPMENT COMPONENTS

Accumulation and transfer conveyors for cut wood

S-shaped conveyor to transport and accumulate the cut logs to the splitter, closed steel chain composed by high resistance metal link, pitch 100 mm, 1 m width. Also available with increased lengths to contain more material and feed more splitting stations.

Rubber belt conveyor to transport the cut logs to the splitter.



S-shaped conveyor combined with TLC 1200



S-shaped conveyor combined with TLA 15



S-shaped conveyor combined with PROF. 2.0



Flat transfert conveyor



S-shaped conveyor combined with TLA 13

► Accumulation and transfer conveyors for cut wood

MODEL	Length*	Width	Material	Drive
Transfer conveyor NAP45	customizable	600/800 mm	rubber	machine hydraulics
Accumulation and transfer conveyor NAS 45	4,5 m	1000 mm	Chain composed by high resistance metal link	machine hydraulics
Accumulation and transfer conveyor NAS 55	5,5 m	1000 mm	Chain composed by high resistance metal link	machine hydraulics

*Also available with increased lengths to contain more material and feed more splitting stations

EQUIPMENT COMPONENTS

Splitting stations

Regenerative system for cycle time reduction

Manual grid centering

Security-light-fence in order to speed up the loading with double startup system.

Possibility of automatic grid centering by laser device which measures the log diameter. It allows to work entering the program to use in order to change folds, according to operator's requests; automatic start of the splitting cycle.



Removable for maintenance operations and interchangeable splitting sector with 10 or 12 or 16 or 18 or 24 folds



GENIUS WEDGE splitting grid designed to obtain the firewood calibration in one single step, optimising logs diameter and minimising waste



11 Ton splitting station, 2+4 folds grid



20 Ton splitting station, 2+4+6 folds grid



32 Ton splitting station, 2+4+6+16 folds grid

EQUIPMENT COMPONENTS

Vertical splitting stations

TB 600 - 900 - 1200

Automatic vertical splitting system to process wood logs of any kind.

Automatic feeding control for the regulation of the log dimensions.

VS 60

Manual hydraulic wood splitter with bowed wedge with 4 orbital knives to obtain 5 firewood blocks per cycle



Automatic vertical splitter TB 900



VS 60 - Bowed wedge with 4 orbital knives



Kindling produced by TB 900 splitter



VS 60 - Double manual hydraulic control



Automatic vertical splitter TB 600

Independent wood splitting stations

MODEL		11 TON	20 TON	27 TON	32 TON	40 TON	GENIUSWEDGE
Maximum splitting passage:	mm	520	710	710	710	710	550
Maximum splitting diameter:	mm	400	550	550	550	550	450
Splitting force:	Ton	11	20	27	32	40	30
Electric motor power:	kW	7,5	15	15	18,5	18,5	22
Cycle time:	s	4	4	4,5	4,7	5	4,7

Vertical splitting stations

MODEL		TB 600	TB 900	TB 1200	VS 60
Minimum log diameter:	mm	300	300	300	-
Maximum log diameter:	mm	600	900	1200	700
Splitting force:	Ton	30	40	50	20
Cut logs length:	mm	up to 500	up to 500	up to 500	up to 500
Electric motor power:	kW	18,5	22	30	18,5
Kindling minimum size:	mm	20x20	20x20	20x20	-
Duty-cycles/minute (stroke 500 mm):	n°	10	8	8	-

The splitting section can vary according to the diameter and length of the log and to the loading type

EQUIPMENT COMPONENTS

Conveyors for transferring and loading the processed material

Big thickness, vulcanized rubber.

Fixed frame in electro-welded structure

Driven by the hydraulics of the machine



Trailer with caster wheels



Flat conveyor for one splitting station



Slewing gear for fixing the conveyor to the floor



Flat conveyor for two splitting stations



Driven caster wheels hydraulically operated

► Loading processed material conveyors

MODEL		NE 60	NE85	NE100	NE120
Length:	m	6	8,5	10	12
Width:	mm	500/600*	500/600*	500/600*	500/600*
Maximum discharge height:	m	3	4,2	4,8	5,4

* Recommended for logs long 500 mm

► Transfert processed material conveyors

MODEL		NPT3	NPT4
Length:	m	3,5	5
Width:	mm	600	600

EQUIPMENT COMPONENTS

Cleaning systems

ROTARY DRUM SCREEN

Drum screener in electrowelded structure with hydraulic gear box. The machine is positioned with an inclination of 5°. Inclination ensures that with no screw conveyor but only using rotary movement, the material moves towards the discharge area after being perfectly screened.

It's suitable for cleaning any quantity of material received each passing.

CLEANING ROLLERS

Cleaning rollers separate bark and residual sawdust from the logs. They can be applied to the conveyor belts carrying cut and split material.



Drum screener with 1800 mm drum diameter



Cleaning rollers combined with TB 900



Output logs without bark and residual sawdust



Cleaning rollers combined to loading conveyor



Drum screener with feeding hopper

► Drum screener

MODEL		1400 A	1400 B
Drum screener diameter:	mm	1400	1800
Drum length:	mm	3200	3200
Useful working length:	mm	2500	2500
Cleaning bar spacing:	mm	40	40
Electric motor power:	kW	5	7,5

EQUIPMENT COMPONENTS

Saw-dust aspirator and pallet packer

SAW-DUST ASPIRATOR

Saw-dust aspirator for distancing the dust from the machine. It can be single or complete with the scraps separator and the collecting system in "big-bags" type.

AUTOMATIC PALLET PACKER

Machine to pack the cut and split firewood on Europallets or on pallets 1000 x 1000 mm.

Fit for any conveyor; suitable for hand loading. Hydraulic system for the handling of the pallet: it compacts the product inside the bag and makes it steady for an easy handling.



Single aspirator



Aspirator with collecting system in "big bags"



Pallet packer with electric motor drive



Pallet packer with machine hydraulics drive



Pallets done by Pezzolato pallets packer



Custom equipments

Attention to the customer and collaboration with specialized distributors around the world have both allowed us to achieve and consolidate our strong know-how and have given us a better understanding of industrial user needs.

Pezzoloto has been designing, building and delivering large, fully customized systems for over twenty years.




▶ Saw-dust aspirator

MODEL		AS3	AS4	AC4
Electric motor:	kW	3	4	4

▶ Automatic pallet packer

MODEL		7501E	7501G	7502E
Drive:		3kW electric motor	Cut/split machine's hydraulics	Cut/split machine's hydr + electric motor 1.1 kW
Pallet dimensions:	m ³	1,6	1,6	2
Overall dimensions:	cm	150x225	150x225	150x225



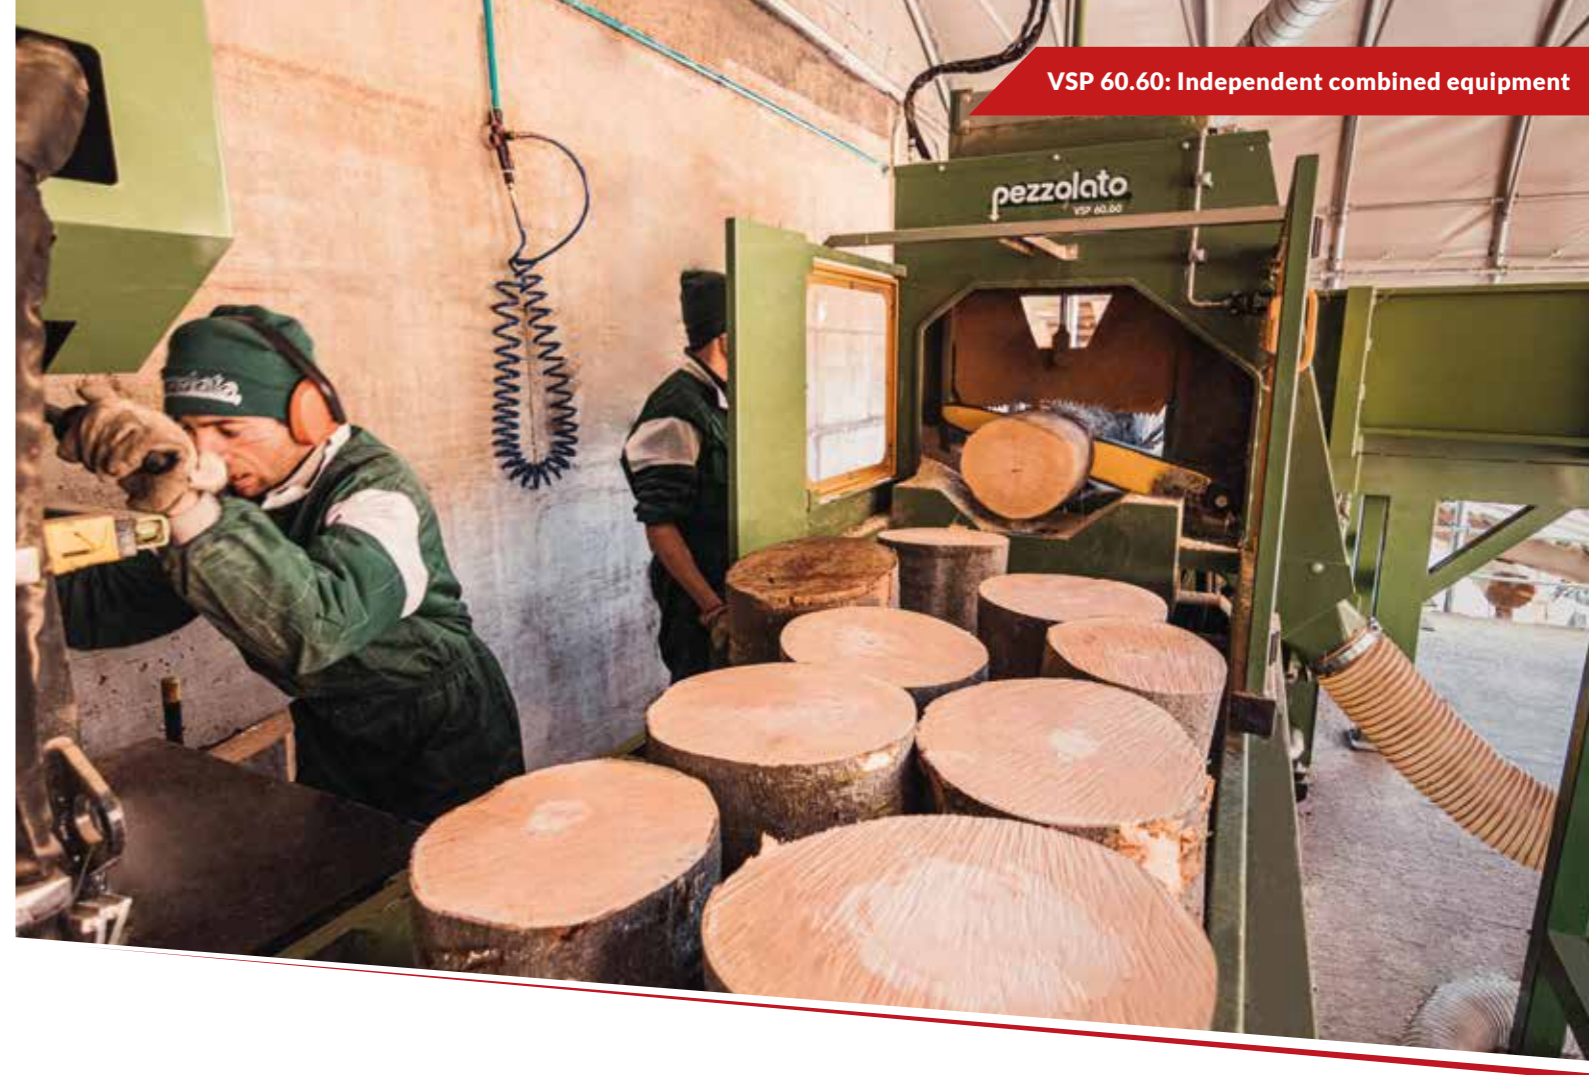

VSP 60.60

► Independent combined equipment

Combined, fully hydraulic machine with manual controls for processing logs with diameters up to 600 mm.

The cutting system includes a solid feeding chain that is 2000 mm in length and moves the material to the chain saw, which cuts logs with a diameter of up to 600 mm.

The hydraulically controlled chain saw produces logs varying from 200 to 500 mm in length. The cut logs are moved to the splitting station by motorised rollers.



Photorelay for automatic log length measurement

The double manual hydraulically controlled wood splitter has a splitting force of 20 t and is made up of a rounded wedge with four orbital blades, producing 5 logs per cycle.

The maximum splitting height is 500mm for diameters up to 700 mm. Following the log splitter the machine can be equipped with an unloading belt for the processed material, with loading up to 3.3 metres.

The machine was designed so that a single operator can alternate between cutting and splitting and achieve satisfying results: with two operators, productivity is exceptional.



Wedge with 4 orbital blades producing 5 logs per cycle



Chain saw



Motorized rollers table for transferring cut logs

► Technical features

Length of toothed log feeding chain	mm	2000
Maximum cutting diameter	mm	600
Minimum cutting length	mm	200
Motorised rollers for moving cut logs	n°	12
Maximum splitting diameter	mm	700
Maximum splitting height	mm	500
Splitting force	Ton	20
Minimum power required from tractor	Hp	40
Electric engine power	kW	18,5
Diesel engine power	Hp	52



Double manual hydraulic control for wood splitterWedge



TM + TB 600: Combined stand alone equipment



TM + TB 600: Combined stand alone equipment

TM 600 + TB 600

► Independent combined equipment

Fully hydraulic combined machine with automatic vertical splitting station for processing logs with diameters of up to 600 mm.

The TM 600 cutting system consists of a feeding system with 3 motorized rollers (600mm between axes) and a 1400mm long toothed chain conveyor that moves the material to the chainsaw cutting unit able to cut logs with a diameter of up to 600 mm.

The hydraulically controlled cutting unit can cut logs of variable length of between 200 and 500mm. The cut logs are moved to the automatic splitting station (TB 600) by a 1400 mm long feeding chain.



Roller conveyor 4900 mm long for the loading - feeding of logs



Combined equipment TM+TB 600

The automatic vertical splitting station (TB 600) can process logs of any nature with diameters of between 300 and 600 mm.

To produce fire starters, logs with diameters of less than 300 mm are acceptable, based on the length which must be a minimum of 50 mm.

Feeding is electronically controlled depending on the size of the log required (minimum kindling size 20 x 20 mm). Push force of the wood splitter is 30 tons.

Productivity rate, with piston stroke of 500 mm, is 10 cycles per minute.

► Technical features

Feeding logs chain length	mm	1400
Driven rollers for feeding logs	n°	3
Maximum cutting diameter	mm	600
Minimum cutting length last cut	mm	200
Transferring cut logs infeed chain length	mm	1600
Maximum splitting diameter	mm	600
Minimum splitting diameter	mm	300
Splitting force	Ton	30
Maximum splitting height	mm	500
Kindling minimum size	mm	20 x 20
Electric engine power	kW	2 x 18,5



3-chain loading deck, 4 meters in length




Kindling production

PROFESSIONAL SOLUTIONS BUILT TO LAST

www.pezzolato.it

Progress and constant research may modify some technical data and descriptions as described in this leaflet, without Pezzolato SpA warning its readers.

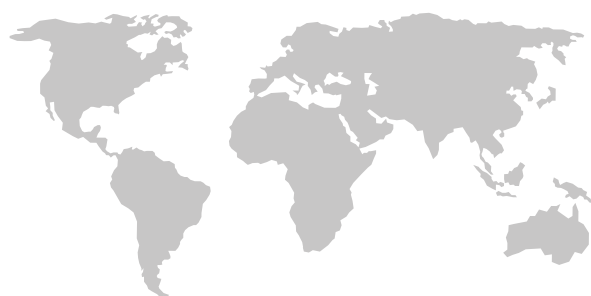

DEALER



Pezzolato Officine Costruzioni Meccaniche S.p.a.
Via Provinciale Revello 89, 12030 Envie (CN) - ITALIA
Tel. (+39) 0175 278077 - Mail: info@pezzolato.it

artbrain.it

TM+TB | 05-2019 | ENG